


- NOTES:
 1.) MOTOR TO BE SHIPPED CONNECTED FOR 230 VOLTS.
 2.) SHAFT EXTENSION TO BE 303 STAINLESS STEEL.



CAT. NO.	S.F.	S.F. AMPS	PROTECTOR	BEARING					
EST1072	1.50	6.8/13.6	AUTOMATIC	BALL-BALL					
MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN
C55CXKLY-5009		POOL AFTERMARKET	3/4	230/115		60	3450	CCW DRIVE END	

MODEL		REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN			
C55CXKLY-5009			POOL AFTERMARKET	3/4	230/115		60	3450	CCW DRIVE END				
SHEET NUMBER	REV	REVISION RECORD FOR: C5177-26								INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN	NIDEC MOTOR CORPORATION		
1 OF 1	B	UPDATED BACKGROUND TO NIDEC.											
REVISION DATE	27-MAR-12												
ISSUED BY	REVIEWED BY	ENGINEER APPROVED		TITLE							CODE	ITEM NO.	SIZE
B. ANDRADE	J. I. SALAZAR	J. I. SALAZAR		ASSEMBLED VIEW							V01	767318	B

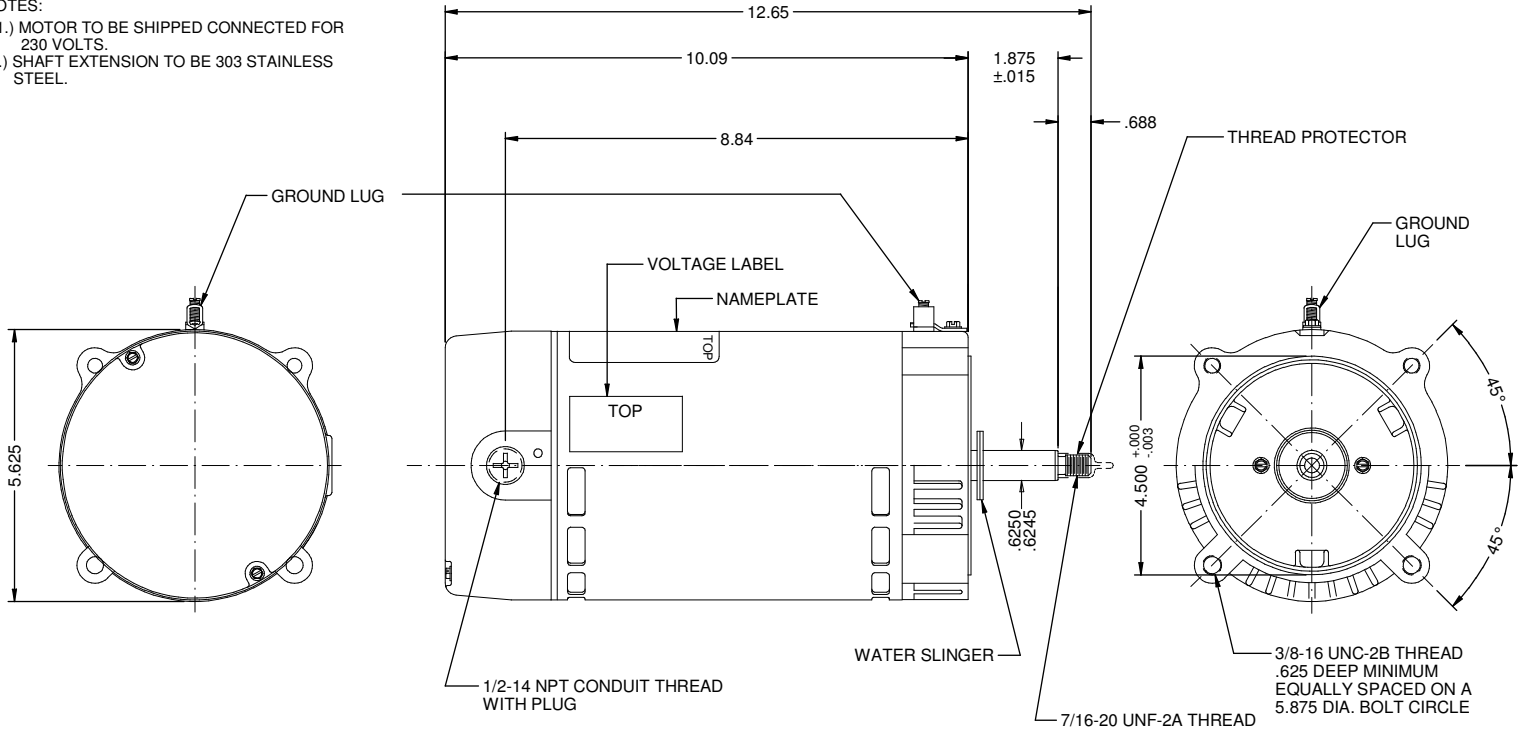

NIDEC MOTOR CORPORATION 27-Mar-12

V01_NMCB (MAR-2011)

SOLIDEDGE