



9 LEADS TO EXTEND 4.000 +2.000, -0.000 INCHES BEYOND TERMINAL COVER AND TUCKED UNDER TERMINAL COVER. WRAP WITH A CABLE TIE. LEADS TO BE SKINNED .750

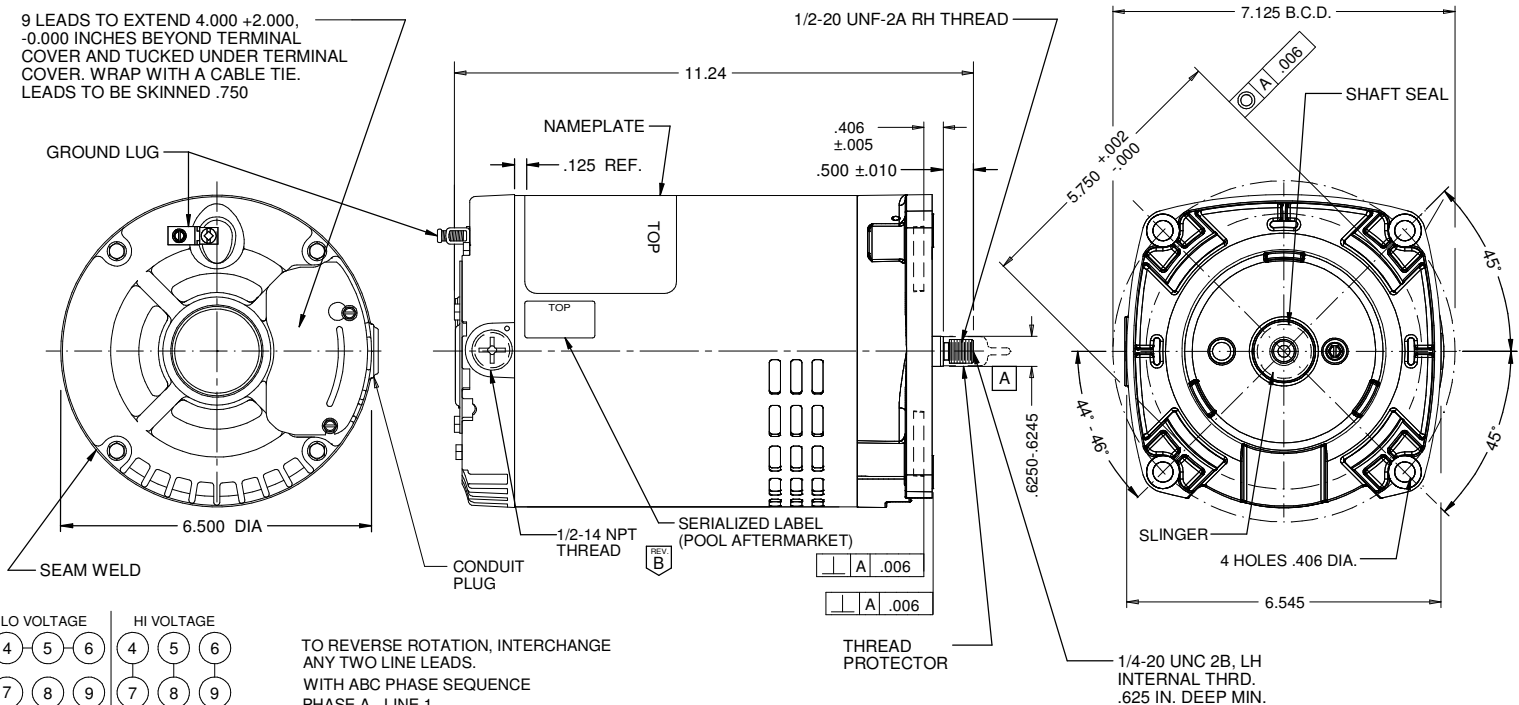

TO REVERSE ROTATION, INTERCHANGE ANY TWO LINE LEADS. WITH ABC PHASE SEQUENCE
 PHASE A - LINE 1
 PHASE B - LINE 2
 PHASE C - LINE 3
 ROTATION: CW LEAD END

NOTES:
 1.) MOTOR TO BE SHIPPED CONNECTED FOR 230 VOLTS (LO VOLTS)
 2.) SHAFT EXTENSION 303 STAINLESS STEEL.

S.F.	S.F. AMPS
1.65/1.00	4.1-3.8/1.9
ROTATION	CUSTOMER PN
CW LEAD END-REV	EH492

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	S.F.	S.F. AMPS
P63GEK-4516		POOL AFTERMARKET	3/4	208-230/460		60/50	3450/2850	1.65/1.00	4.1-3.8/1.9
REVISION RECORD FOR: C7458-15								ROTATION	
ADDED SERIALIZED LABEL								CUSTOMER PN	
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION								NIDEC MOTOR CORPORATION	
ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN								TITLE	
ASSEMBLED VIEW								CODE	
ISSUED BY								ITEM NO.	
B. ANDRADE								770371	
REVIEWED BY								SIZE	
J. SCHRADER								B	
ENGINEER APPROVED								SOUDEGE	
J. SCHRADER									